
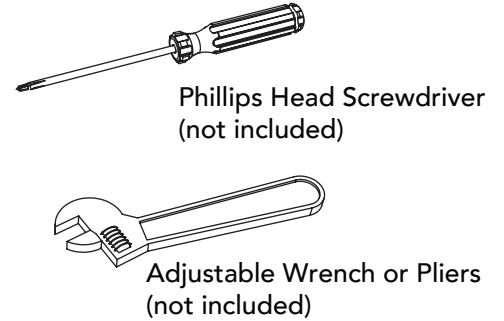


**Contents:**

**Tools Required:**

\* Additional Hardware May Be Included.

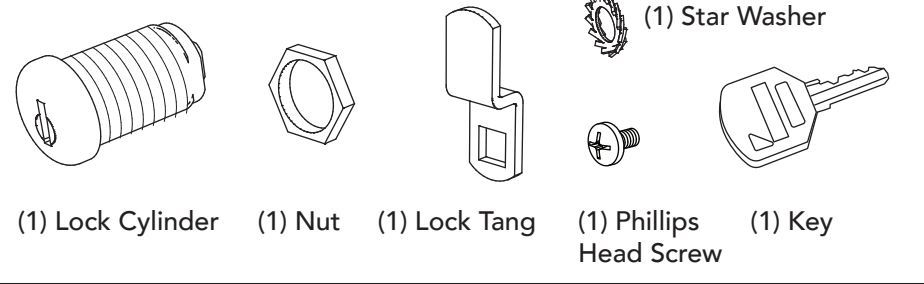

- 1** Remove plug from drawer by squeezing two clips on the plug inside the drawer face.
- 2** Replace plug with Lock Cylinder making sure Lock Cylinder face is oriented as shown.
- 3** Securely tighten Nut onto Lock Cylinder from inside the drawer with an adjustable wrench or pliers.
- 4** Place Lock Tang onto Lock Cylinder with the bend in the Tang going towards the front of the drawer as shown.
- 5** Using screwdriver tighten phillips head screw into the end of the Lock Cylinder to secure the Lock Tang.
- 6** Check to make sure key properly operates lock.

